


# PORTABLE SCREW COMPRESSOR

## PDS390S



### Main Improvements:

- ◆ Ultra compact and lightweight unibody structure.
- ◆ The adoption of a two-wheeled trailer makes a small turning radius and easy handling in the field dramatically.
- ◆ Efficient direct driven twin screw air-end increases service life and makes excellent fuel consumption.
- ◆ Parallel installation of radiator and oil cooler has enabled easy and smooth cleaning and washing of both radiator and cooler.
- ◆ By combination of low noise engine and large-sized low noise muffler, noise level has been lowered.
- ◆ The adoption of large-sized and hinged double doors, so easy accessibility to interior inspection and maintenance has been secured.

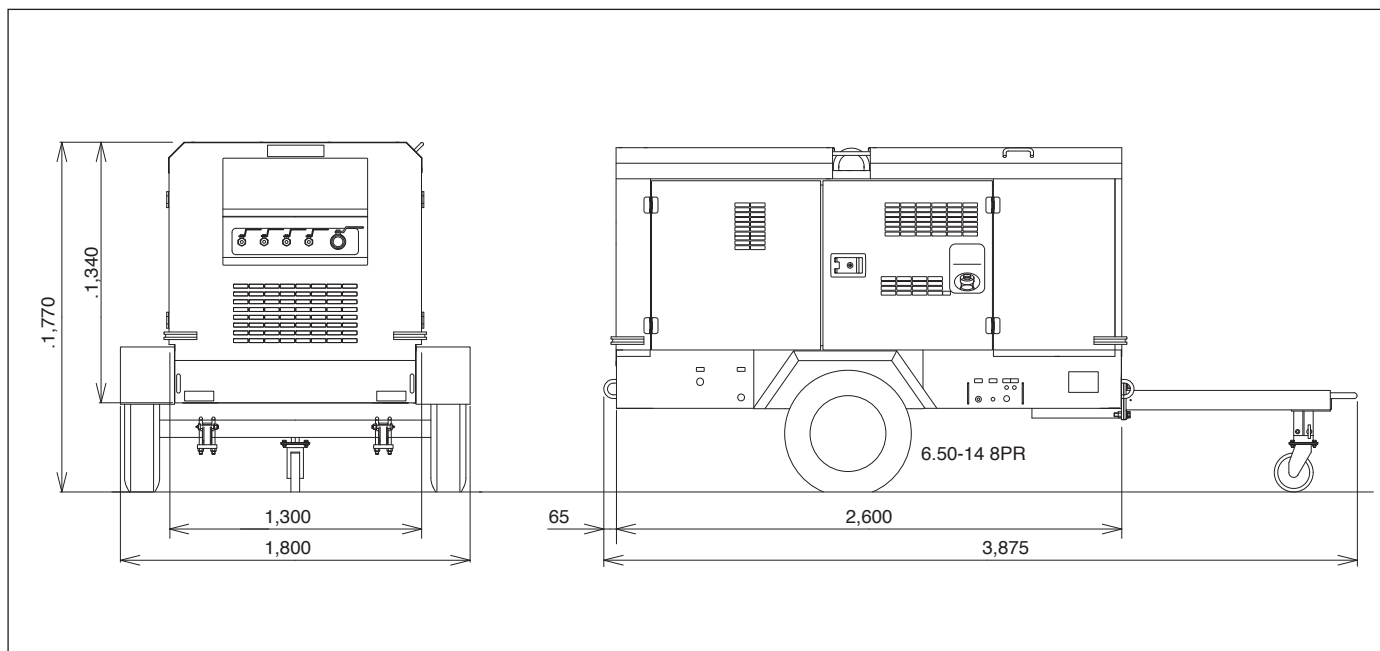

## SPECIFICATIONS PDS390S-4B1

### COMPRESSOR

Type	Rotary twin screw, single stage, oil-cooled
Free air delivery	11.0 m <sup>3</sup> /min(390 cfm)
Working pressure	0.7MPa(7.1 kgf/cm <sup>2</sup> G)(102 psi)
Unloader	Suction port closing in connection with stepless speed regulator
Lubrication system	Forced lubrication by compression pressure
Driving system	Direct coupling with gears
Oil cooling	Air-cooled
Air cleaner	Dry paper filter type

### DIESEL ENGINE

Model	ISUZU DD-4BG1T
Type	Water-cooled, 4-cycle, direct injection, turbo-charged type
No. of cylinders	4
Cyl. bore X stroke	105 mm x 125 mm
Total displacement	4.329 liters
Compression ratio	18.0 : 1
Rated output	80.9 kW/2,400 min <sup>-1</sup> (110 PS/2,400 rpm)
Max. torque	367 Nm/approx. 1,800 min <sup>-1</sup> (37.4 kgf·m/approx. 1,800 rpm)
Injection pump	Bosch A type
Governor	Centrifugal, all-speed
Alternator	AC 24 V, 25 A
Starting motor	DC 24 V, 4.5 kW
Battery	80D26R-MF(NX110-5MF)x2 pc.
Air cleaner	Dry type
Fuel tank capacity	180 liters
Engine oil capacity(including oil cooler)	13 liters
Coolant capacity(including engine radiator)	13 liters
Compressor oil capacity(including receiver tank & oil cooler)	51 liters

### OIL SEPARATOR-RECEIVER TANK

Type	Vertical, cylindrical, full-welded
Shell dia.	φ400 mm
Shell length	752 mm
Capacity	0.098 m <sup>3</sup>
Max. working pressure	1.0 MPa(10.2 kgf/cm <sup>2</sup> G)
Hydraulic test pressure	1.5 MPa(15.3 kgf/cm <sup>2</sup> G)
Air outlet valve	50A x 1 pc., 20 A x 4 pcs.

### INSTRUMENTS & GAUGES

#### EMERGENCY STOP DEVICES

Oil pressure switch  
 Engine coolant temperature switch  
 Discharge air temperature switch  
 Engine speed down switch

#### GAUGES

Pressure gauge	Starter switch
Tachometer (with houemeter)	Stop button
Discharge air temperature gauge	Starting unloader valve
Engine coolant temperature gauge	Panel lamp switch
Fuel gauge	Glow lamp

#### WARNING LAMP

For engine oil pressure drop  
 For engine coolant temperature rise  
 For discharge air temperature rise  
 For battery charging  
 For engine speed down

### WEIGHT

Dry weight	1,825 kgs
Operating weight	2,040 kgs

## HOKUETSU INDUSTRIES CO., LTD.

8TH Floor Shinjuku San-Ei Bldg,  
 22-2 Nishi-Shinjuku 1-Chome, Shinjuku-ku, Tokyo 160-0023 Japan  
 TEL:81-3-3348-7281 FAX:81-3-3348-7289  
 E-mail:oversea@airman.co.jp  
 http://www.airman.co.jp

## HOKUETSU INDUSTRIES EUROPE B.V.

Aalsmeerderdijk 156, 1438 AX Oude Meer, Nederland  
 TEL:31-20-6462636 FAX:31-20-6462191  
 e-mail:info@hokuestu.nl

### SAFETY

- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents, perform daily and preventive maintenance checks without fail.



ISO9001 : JQA-0581  
 ISO14001 : JQA-EM4670